


## CT-473:

- Cylindrical thread GAS DIN 228.(optional NPT)
- Valve manufacture AISI – 304 / 316.
- PN – 40 (580 PSI).
- Working temperature (°C): VITON: -25 / 150°.
- Standard manufacturing with **VITON (FPM)** seal.
- The valve is designed to avoid accumulation of impurities on the sealing and obtain optimum tightness according fluid conditions non dangerous even painting and dairy process. Seal is semi spherical reduces previous above indicated.
- Machined to allow tighten on easy installations.

DN	Description	Opening pressure mbar
15	Check Valve 1/2"	0,10
20	Check Valve 3/4"	0,06
25	Check Valve 1"	0,05
32	Check Valve 1-1/4"	0,04
40	Check Valve 1-1/2"	0,05
50	Check Valve 2"	0,05

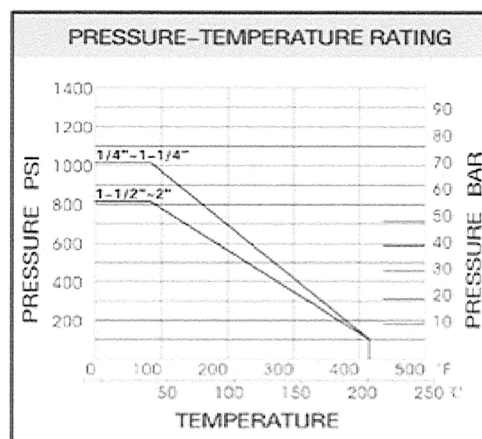

## DIMENSIONS:

Size	D	d	L	(Kgs)
1/2"	26	13	47	0.090
3/4"	33	17,5	58,5	0,166
1"	42	24	70	0,305
1-1/4"	59,5	30	75	0,682
1-1/2"	59,5	36,5	75,5	0,657
2"	72,5	46,5	89,5	0,896

## MATERIALS:

Nº	Description	Material-AISI	Quantity
1	Body	304L / 316L	1
2	Centering machine	304L / 316L	1
3	Semi ball	304L / 316L	1
4	Spring	302	1
5	Guide	316L	1

Nom-binding information sheet and may be modified without notice.